

SMITH, GAMBRELL & RUSSELL, LLP

ATTORNEYS AT LAW

SUITE 800

1850 M STREET, N.W.

WASHINGTON, D.C. 20036

TELEPHONE

(202) 659-2811

FACSIMILE

(202) 659-1462

WEBSITE

www.sgrlaw.com

ATLANTA OFFICE

SUITE 3100, PROMENADE II

1230 PEACHTREE STREET, N.E.

ATLANTA, GEORGIA 30309-3592

(404) 815-3500

FACSIMILE (404) 815-3509

PRACTICING AS THE

BEVERIDGE, DEGRANDI, WEILACHER & YOUNG

INTELLECTUAL PROPERTY GROUP

October 20, 2000

Asst. Commissioner for Patents  
Washington, D.C. 20231

**PATENT APPLICATION TRANSMITTAL LETTER**

Inventor(s): Tadashi ONO, et al.

**"DATA RECORDING APPARATUS, MEDIUM AND  
INFORMATION PACKAGE"**

Attorney Docket No.: 33216M059

Sir:

Transmitted herewith for filing are the following:

New patent application including 34 pages of text, 8 sheets of formal drawings, signed Declaration, signed Assignment and Recordation Cover Sheet, and and a check for \$1522.00.

Counsel's check for the fee which has been calculated as shown below.

Basic Fee	\$ 710.00
Independent Claim fee (5-3 = 2 x \$80)	\$ 160.00
Dependant Claim fee (39-20 = 19 x \$18)	\$ 342.00
Multiple Dependant Claim fee	\$ 270.00
Assignment Fee	<u>\$ 40.00</u>

**TOTAL:** **\$ 1,522.00**


JC685 U.S. PTO  
10/20/00

JC606 U.S. PTO  
09/692312  
10/20/00

09692312 "102000"

Page 2

Respectfully submitted,

By   
Michael A. Makuch  
Reg. No. 32,263

Variable	Mean	SD	Min	Max
Age	35.5	10.5	18	65
Gender	Male	Female		
Marital status	Married	Single		
Education	High school	College		
Occupation	Manager	Worker		
Income	\$10,000	\$20,000		
Health status	Good	Poor		
Exercise frequency	Weekly	Monthly		
Stress level	Low	High		
Sleep quality	Good	Poor		
Dietary habits	Healthy	Unhealthy		
Alcohol consumption	None	Occasional		
Tobacco use	Non-smoker	Smoker		
Family size	2	3		
Work hours	40	50		
Commuting time	30	45		
Home ownership	Renter	Owner		
Neighborhood safety	Safe	Unsafe		
Access to green spaces	Yes	No		
Proximity to public transport	Close	Far		
Local government involvement	Active	Passive		
Community engagement	High	Low		
Local business presence	Strong	Weak		
Local government responsiveness	High	Low		
Local government transparency	High	Low		
Local government accountability	High	Low		
Local government effectiveness	High	Low		
Local government efficiency	High	Low		
Local government equity	High	Low		
Local government inclusivity	High	Low		
Local government sustainability	High	Low		
Local government innovation	High	Low		
Local government leadership	High	Low		
Local government vision	High	Low		
Local government mission	High	Low		
Local government values	High	Low		
Local government culture	High	Low		
Local government identity	High	Low		
Local government reputation	High	Low		
Local government image	High	Low		
Local government brand	High	Low		
Local government logo	High	Low		
Local government website	High	Low		
Local government social media	High	Low		
Local government newsletter	High	Low		
Local government press release	High	Low		
Local government press conference	High	Low		
Local government press kit	High	Low		
Local government press book	High	Low		
Local government press folder	High	Low		
Local government press bag	High	Low		
Local government press box	High	Low		
Local government press table	High	Low		
Local government press chair	High	Low		
Local government press tent	High	Low		
Local government press canopy	High	Low		
Local government press backdrop	High	Low		
Local government press banner	High	Low		
Local government press sign	High	Low		
Local government press poster	High	Low		
Local government press brochure	High	Low		
Local government press flyer	High	Low		
Local government press card	High	Low		
Local government press letter	High	Low		
Local government press envelope	High	Low		
Local government press stamp	High	Low		
Local government press seal	High	Low		
Local government press ribbon	High	Low		
Local government press cord	High	Low		
Local government press chain	High	Low		
Local government press belt	High	Low		
Local government press bag	High	Low		
Local government press box	High	Low		
Local government press table	High	Low		
Local government press chair	High	Low		
Local government press tent	High	Low		
Local government press canopy	High	Low		
Local government press backdrop	High	Low		
Local government press banner	High	Low		
Local government press sign	High	Low		
Local government press poster	High	Low		
Local government press brochure	High	Low		
Local government press flyer	High	Low		
Local government press card	High	Low		
Local government press letter	High	Low		
Local government press envelope	High	Low		
Local government press stamp	High	Low		
Local government press seal	High	Low		
Local government press ribbon	High	Low		
Local government press cord	High	Low		
Local government press chain	High	Low		
Local government press belt	High	Low		
Local government press bag	High	Low		
Local government press box	High	Low		
Local government press table	High	Low		
Local government press chair	High	Low		
Local government press tent	High	Low		
Local government press canopy	High	Low		
Local government press backdrop	High	Low		

## SPECIFICATION

### TITLE OF THE INVENTION

DATA RECORDING APPARATUS, MEDIUM AND INFORMATION PACKAGE

### BACKGROUND OF THE INVENTION

#### Field of the Invention

The present invention relates to a data recording apparatus that captures data to be continuously processed such as video data or voice data into a computer, converts the data to a file and records it in a recording medium such as a hard disk.

#### Related Art of the Invention

Capturing video data recorded in a video camera, etc. into a computer and converting it in an animation file is called "image capturing." A typical example of formatting of this image captured animation file is an AVI file handled by the Windows operating system.

With commercialization of the IEEE1394 interface and increasing-capacity of hard disk drives in recent years, it is now possible to handle relatively low-compression rate video data such as DV (Digital Video) as an AVI file.

As a result, it is possible to easily capture a high-quality animation recorded in a DV format into a computer

and to edit it by software without deterioration of image quality.

However, handling an AVI file involves the following problems:

(1) The maximum capacity of one file handled by Windows is  $2^{31}$  bytes (" $\wedge$ " denotes power), that is, 2 GB. On the contrary, video data in a DV format which is suitable for NTSC format of present TV signal is 120,000 bytes per 1 frame and so when DV data is captured, only data for approximately 9 minutes can be captured even if there is an enough space in the hard disk. Thus, a problem arises that if one file becomes full, subsequent image data must be abandoned. Furthermore, even if the data spilling out of the file is stored in another file, when it is stored in the other file in the middle of a frame, that is, one frame is recorded on different areas noise can occur in the reproduced data.

(2) Furthermore, an animation or voice mode in an AVI file format must be unique within one file. For example, mode information that indicates a voice mode includes a sampling frequency and the sampling frequency must be constant in one AVI file.

On the contrary, it is known that in a DV format, three types of voice sampling frequency of 48 kHz, 44.1 kHz and 32 kHz are mixed within one file and a mixture of these three may exist on one tape. Therefore, if such animation is captured

in a conventional AVI file format, a problem arises that that when reproduced, the stored data may include noise.

(3) Furthermore, since animation and voice data converted to an AVI file are digital data, the copyright issue should be taken into account. Generally, an AVI file contains copyright information that means the file (1) can be reproduced any number of times (COPY FREE), (2) can be reproduced only one time (COPY FREE) or (3) cannot be reproduced (COPY NEVER or COPY NO MORE). Capturing or reproducing animation ignoring this copyright information is not permitted. However, when data is converted to an AVI file conventionally, a problem arises that copyright is not taken into account enough.

(4) Furthermore, when the remaining recording capacity of a recording area (normally partition) becomes 0 during capturing, a problem arises that that no more video data can be recorded. Even if the remaining data is recorded in another recording area, when the recording area is switched in the middle of a frame, that is, one frame is recorded on different areas, a problem arises that that noise can be generated when the data is reproduced.

#### **SUMMARY OF THE INVENTION**

In view of these problems it is an object of the present invention to provide a data recording apparatus or the like capable of recording data correctly.

The 1<sup>st</sup> invention of the present invention is a data recording apparatus that sequentially inputs data configured in units that cannot be recorded across different files and records the data in a file having a predetermined volume, comprising:

size detecting means for deciding when data is sequentially recorded in file, whether next unit of the data to be recorded can be fully recorded in the same file, or not;

file creation controlling means for recording said next data to be recorded in another file or stopping recording if the case where the result of the decision by said size detecting means shows that recording is not possible; and

file writing means for writing data in a file according to the control from said file creation controlling means.

The 2<sup>nd</sup> invention of the present invention is a data recording apparatus that records data in a file comprising:

detecting means for detecting a change of a property attached to said data;

file recording controlling means for recording data in said plurality of files or stopping recording according to said change of the property; and

file writing means for writing data in a file according to the control from said file creation controlling means.

The 3<sup>rd</sup> invention of the present invention is a data recording apparatus that records data in a file comprising:

detecting means for detecting a change of a property attached to said data;

file recording controlling means for converting the property of said data to the previous property and recording data in said file when said detecting means detects a change of the property; and

file writing means for writing data in a file according to the control from said file creation controlling means.

The 4<sup>th</sup> invention of the present invention is a data recording apparatus that records data inputted in file units in another file, comprising:

detecting means for detecting the type of a property attached to said data;

file recording controlling means for when said detecting means detects a plurality of types of property in one file, converting and unifying properties of all data that belongs to the file to a property of one of the plurality of types of property and recording the data in a new file; and

file writing means for writing data in a file according to the control from said file creation controlling means.

The 5<sup>th</sup> invention of the present invention is a data recording apparatus that sequentially inputs data configured in units that cannot be recorded across different recording areas and records the data as a file in a recording area having a predetermined volume, comprising:

size detecting means for deciding when data is sequentially recorded in the recording area whether next unit of the data to be recorded can be fully recorded in the same recording area, or not;

file creation controlling means for recording said next data to be recorded in another recording area or stopping recording if the result of the decision by said size detecting means shows that recording is not possible; and

file writing means for writing data in a file according to the control from said file creation controlling means.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

Fig. 1 is a block diagram of a data capture apparatus according to a first embodiment of the present invention.

FIG. 2 is a block diagram of a data capture apparatus according to a second embodiment of the present invention.

FIG. 3 is a block diagram of a data capture apparatus according to a third embodiment of the present invention.

FIG. 4 is a block diagram of a data capture apparatus according to a fifth embodiment of the present invention.

FIG. 5 is a block diagram of a data capture apparatus according to a fourth embodiment of the present invention

FIG. 6 is a block diagram of a data capture apparatus according to a sixth embodiment of the present invention.



FIG. 7 is a block diagram of a data capture apparatus according to a seventh embodiment of the present invention.

FIG. 8 is a block diagram of a data capture apparatus according to a modification example of the fifth embodiment of the present invention.

#### **Description of Symbols**

- 101 Input section
- 102 Buffer
- 103 Image size detection section
- 104 File creation control section
- 105 File writing section
- 106 Output section
- 201 Image mode information detection section
- 301 Voice mode information detection section
- 401 Switch
- 402 Voice mode conversion section
- 501 Copyright information detection section
- 502 Switch
- 503 Copyright information conversion section
- 601 Image mode information detection section
- 602 Buffer
- 603 Image mode conversion section
- 701 Recording area residual quantity detection section
- 702 File creation control section

801 Image mode information detection section

802 Image mode conversion section

## PREFERRED EMBODIMENTS OF THE INVENTION

Referring to the attached drawings, embodiments of the present invention will be described below. In the following description of embodiments, explanations of the blocks already explained will be omitted.

(First embodiment)

FIG. 1 illustrates a configuration of a data capture apparatus according to a first embodiment of the present invention. In FIG. 1, reference numeral 101 denotes an input section; 102, a buffer; 103, an image size detection section; 104, a file creation control section; 105, a file writing section; and 106, an output section.

Now, the operation of the first embodiment will be described with reference to FIG. 1. In this embodiment, suppose an upper limit of a file size, that is, a total size is 2 GB.

Animation data inputted from the input section 101 is stored in the buffer 102 in frame units. The animation size detection section 103 detects a frame number (1, 2, ..., K; K: positive integer) of frame-unit video data stored in the buffer 102 and size of each frame (frame size). The animation size detection section 103 also calculates the total size, which

accumulates frame sizes in the frame number order. Analyzing the header section of the DV data format makes it possible to know the frame size, etc.

When capturing of animation is started, the file creation control section 104 instructs the file writing section 105 to open file A, which is a file preset for data recording to convert the video data to a file. However, as described above, the total size of file A is set to be 2 GB or less.

Then, the file writing section 105 writes the video data stored in the buffer 102 in the frame number order as far as the total size of file A, that is, 2 GB is exceeded.

Then, in the image size detection section 103, if it is found that the total size (total size up to the image data of frame number N) of 2 GB will be exceeded if the image data of frame number N is written additionally, this means that the size of file A exceeds 2 GB. Thus, the image size detection section 103 notifies the file creation control section 104 of excessive total size information.

It is also possible to notify of the excessive total size information if a comparison result shows that the Nth data is bigger than such difference between the total size of up to the (N-1)th data and 2 GB.

Upon receipt of the excessive total size information, the file creation control section 104 instructs the file writing section 105 to close file A and to open file B, which

is a file for recording new video data, even if file A is not full. The file writing section 105 closes file A in which the video data of up to frame number (N-1) is recorded and opens file B.

Furthermore, the file writing section 105 outputs file A that has been closed just before from the output section 106. At this time, the total size is cleared to zero and image data from frame number N onward is recorded in file B.

The above operations are repeated and when all video data stored in the buffer 102 is written, the file creation control section 104 instructs the file writing section 105 to close the file in which the last video data is written. The file writing section 105 closes the file above and outputs it from the output section 106.

The information that the next file of the data that belongs to file A is file B, etc. is retained as an index table, which makes it possible to easily reproduce continuous image data, or the like.

As shown above, when recording data in a file, this embodiment can capture even high bit rate image data for a long time exceeding 2 GB without omissions.

This embodiment prevents data that belongs to one frame from being stored in different files separately in frame units. In the case of MPEG, for example, using GOP as a unit it is also possible to prevent data that belongs to one GOP from

being stored in different files separately. In short, the present invention can be applied to cases where data pieces configured in units whose data should not be recorded in more than one separate file are recorded sequentially and such units can also be anything in addition to the above frame or GOP.

Moreover, when the data of the next unit is likely to exceed the file capacity, it is also possible to stop recording. This is because in this way it is possible to prevent incomplete data less than 1 frame or 1 GPO from remaining in a file.

(Second embodiment)

FIG. 2 illustrates a configuration of a data capture apparatus according to a second embodiment of the present invention. In FIG. 2, reference numeral 201 is an image mode information detection section.

Now, the operation of the second embodiment will be described with reference to FIG. 2.

As in the case of the first embodiment, video data input from the input section 101 is stored in the buffer 102 in frame units. An image mode information detection section 201 acquires the image mode information entered. However, in this embodiment, suppose the image mode information at the start of capturing is of an SDTV system. This image mode information is stored, for example, in the header section in a DV format.

When capturing of animation is started, the file creation control section 104 instructs the file writing section 105

to open file A, which is a file preset for data recording in order to convert the images to a file. The file writing section 105 writes the video data stored in the buffer 102 in file A as long as it confirms that the image mode information is of an SDTV system.

Then, when the image mode information detection section 201 finds, for example, that the image mode information owned by the video data of frame number N is of an HDTV system, the image mode information detection section 201 notifies the file creation control section 104 of image mode change information, which is information indicating a change of the image mode information.

Upon receipt of the image mode change information, the file creation control section 104 instructs the file writing section 105 to close current file A and open file B, which is a file for recording new video data. The file writing section 105 closes file A in which the SDTV-based video data of up to frame number N-1 is recorded and opens file B. Furthermore, the file writing section 105 outputs file A that has been closed just before from the output section 106.

Hereafter until the image mode information is changed again, HDTV-based image data is written in this file B.

When the above operations are repeated and all video data stored in the buffer are written, the file creation control section 104 instructs the file writing section 105 to close

the file in which the last video data is written. The file writing section 105 closes the file above and outputs it from the output section 106.

As shown above, this embodiment can capture video data in different signal modes into different files without omissions.

This embodiment describes the case of SDTV and HDTV as examples of image mode information. In addition to these, the actual image mode information also includes parameters such as frame frequency, encode format, number of vertical lines together and it is also possible to select and use these parameters as appropriate.

When capturing image data in different signal formats, the present invention records them in different files, but can also be configured so as to stop capturing when the signal format changes. This can prevent data having different image mode information from being stored in one file.

(Third embodiment)

FIG. 3 illustrates a configuration of a data capture apparatus according to a third embodiment of the present invention. In FIG. 3, reference numeral 301 denotes a voice mode information detection section.

The operation of the third embodiment will be described with reference to FIG. 3 below.

Animation data with voice is input from the input section 101 and stored in the buffer 102 in predetermined units (here, frame units). The voice mode information detection section 301 acquires the voice mode information of the image data entered. However, in this embodiment, suppose the voice mode information at the start of capturing has a sampling frequency of 48 kHz.

When capturing of animation is started, the file creation control section 104 instructs the file writing section 105 to open file A, which is a file preset for data recording in order to convert the animation to a file. The file writing section 105 writes the video data stored in the buffer 102 in file A as long as its sampling frequency is 48 kHz.

Then, when the voice mode information detection section 301 finds, for example, that the voice sampling frequency, which is the voice mode information owned by the video data with voice of frame number N, has changed from 48 kHz to 32 kHz, the voice mode information detection section 301 notifies the file creation control section 104 of voice mode change information, which is information indicating a change of the voice mode information.

Upon receipt of the voice mode change information, the file creation control section 104 instructs the file writing section 105 to close current file A and open file B, which is a file for recording new video data. The file writing



section 105 closes file A in which the video data with voice of a voice sampling frequency of 48 kHz of up to frame number N-1 is recorded and opens file B. Furthermore, the file writing section 105 outputs file A that has been closed just before from the output section 106.

Hereafter until the voice sampling frequency is changed again, image data including voice data of 32 kHz is written in file B.

When the above operations are repeated and all image data stored in the buffer is written, the file creation control section 104 instructs the file writing section 105 to close the file in which the last video data with voice is written. The file writing section 105 closes the file above and outputs it from the output section 106.

As shown above, this third embodiment can capture image data with voice into different files without data omissions even if the voice mode changes in the middle of capturing.

This third embodiment describes the sampling frequency as an example of voice mode information. The actual voice mode information also includes parameters such as number of bits per one sound element, number of channels and voice invalid information together and it is also possible to select and use these parameters as appropriate.

(Fourth embodiment)

FIG. 5 illustrates a configuration of a data capture apparatus according to a fourth embodiment of the present invention. In FIG. 5, reference numeral 501 denotes a copyright information detection section, reference numeral 502 denotes a switch and reference numeral 503 denotes a copyright information conversion section.

The operation of the fourth embodiment will be described with reference to FIG. 5 below.

Animation data with copyright information is input from the input section 101 and stored in the buffer 102 in predetermined units (here, frame units). The copyright information detection section 501 acquires the copyright information of the image data entered. For example, the copyright information exists in the auxiliary data section in a DV format.

Here, suppose there are three types of copyright information in this embodiment; (A) COPY FREE, (B) COPY ONCE, and (C) COPY NEVER or COPY NO MORE.

First, when the copyright information acquired is (A) or (B), that information is notified to the file creation control section 104 and the file creation control section 104 instructs the file writing section 105 to open file A, which is a file preset for data recording in order to convert the images to a file. On the other hand, when the copyright information is (C), since the captured file is a reproduction

of the relevant image data, the file writing section 105 performs no capturing, closes file A and finishes operation.

Then, when the acquired copyright information is (A) or (B), the video data stored in the buffer 102 is output via the switch 502. At this time, if the copyright information of the first video data is (A), the switch 502 selects the output on the  $\alpha$  side. In this case, the video data is supplied to the file writing section 105 as is and written in file A. This operation is repeated as long as the copyright information is (A).

Furthermore, if in the copyright information detection section 501, for example, the copyright information owned by the video data of frame number N or the copy right in formation owned by the each frame, is changed to (B), the copyright information detection section 501 supplies copyright information change information, which is information indicating a change of the copyright information to the file creation control section 104.

Upon receipt of the copyright information change information, the file creation control section 104 instructs the file writing section 105 to close current file A and open file B, which is a file for recording new video data. The file writing section 105 closes file A in which the video data of up to frame number N-1 whose copyright information is (A) is recorded and opens file B.



the data in another file or stops capturing. This prevents different type of copyright information from existing in one file, eliminating the need to perform complicated copy protection operations. Furthermore, when the copyright information is of a type with one-time permission of reproduction, this embodiment can prohibit further files from being reproduced by writing the copyright information in a file with reproduction prohibited.

(Fifth embodiment)

FIG. 4 illustrates a configuration of a data capture apparatus according to a fifth embodiment of the present invention. In FIG. 4, reference numeral 401 denotes a switch and reference numeral 402 denotes a voice mode conversion section.

The operation of the fifth embodiment will be described with reference to FIG. 4 below. Animation data with voice is input from the input section 101 and stored in the buffer 102 in predetermined units (here, frame units). The voice mode information detection section 301 acquires the voice mode information of the video data entered. Here, in this embodiment, suppose the number of bits per 1 sound element of the video data is 16 bits at the beginning of capturing and this voice mode information is retained as initial voice mode information in the voice mode information detection section 301.

When capturing of the animation is started, the file creation control section 104 instructs the file writing section 105 to open file A, which is a file preset for data recording in order to convert the images to a file.

Next, the video data stored in the buffer 102 is output via the switch 401. At this time, if the voice mode information owned by the video data to be recorded matches the initial voice mode information, the switch 401 selects the output on the  $\alpha$  side.

In this case, the video data of the buffer 102 is written by the file writing section 105 with no conversion.

On the other hand, if the voice mode information owned by the video data does not match the initial voice mode information, if, for example, the number of bits per one sound element is 8 bits, the switch 401 selects the output on the  $\beta$  side. At this time, the voice data of the buffer 102 is supplied to the voice mode information conversion section 402. In this embodiment, the voice mode information conversion section 402 converts voice data of 8 bits per 1 sound element entered to 16 bits and supplies it to the file writing section 105. For example, the voice mode information conversion section 402 converts the voice data by up-converting and then filtering it.

As shown above, when the voice mode information of the first data is different from the voice mode information of

the data to be written in a file, this embodiment converts data to the voice mode information of the first data, making it possible to record data having the same voice mode information in one file.

If the case where the voice mode information is a sampling frequency, this embodiment converts the sampling frequency using an appropriate filter.

The embodiment above describes the case where processing is carried out only on voice data. However, as shown in FIG. 8, it is also possible to handle the aforementioned image mode information instead of the voice mode information. That is, using the image mode conversion section 801 instead of the voice mode information detection section 401 and using the image mode conversion section 802 instead of the voice mode information detection section 402, it is possible to convert video data and continuously record the video data with the same image mode information in one file.

(Sixth embodiment)

FIG. 6 illustrates a configuration of a data capture apparatus according to a sixth embodiment of the present invention. In FIG. 6, reference numeral 601 denotes an image mode information detection section, reference numeral 602 denotes a buffer and reference numeral 603 denotes an image mode conversion section.

The operation of the sixth embodiment will be described with reference to FIG. 6 below.

For video data with image mode information input from the input section 101, the image mode information detection section 601 acquires image mode information in frame units. Suppose this data entered has already been converted to a file as already described in the first to fifth embodiments. Animation data is retained in the buffer 602, which has a sufficiently large capacity.

When capturing of the video data corresponding to at least one file is completed, if the case where the image mode information detected by the image mode information detection section 601 is of a predetermined type, the video data is not directly converted by the image mode conversion section 603, but the file writing section 105 writes the data in a file directly and outputs it from the output section 106.

On the other hand, if the type of the image mode detected by the image mode information detection section 601 is other than a predetermined type, the image mode conversion section 603 converts the video data to data of the predetermined type.

The file writing section 105 writes this data in a file and outputs it from the output section 106.

As described above, this embodiment can provide one unified type of image mode.



If the case where a plurality of types of image mode is included targeted at properties such as the above described voice mode information instead of this image mode information, it is also possible to unify those types to any one type so that only one property is present in one file.

What this embodiment differs from the fifth embodiment is as follows. That is, in the fifth embodiment, of a plurality of types of property, the properties are unified to the property appearing first, while in this embodiment, properties only need to be unified to any one type of properties. For example, properties can be unified to the property appearing last in one file.

(Seventh embodiment)

FIG. 7 illustrates a configuration of a data capture apparatus according to a seventh embodiment of the present invention. In FIG. 7, reference numeral 701 denotes a recording area residual quantity detection section and reference numeral 702 denotes a file creation control section.

The operation of the seventh embodiment will be described with reference to FIG. 7 below.

The video data input from the input section 101 is stored in the buffer 102 in frame units. The animation size detection section 103 detects the frame number (1, 2, ..., K; K: positive integer) of frame-unit video data stored in the buffer 102 and its size (frame size). The animation size detection

section 103 further calculates the total size, which accumulates frame sizes in the frame number order.

When capturing of animation is started, the file creation control section 702 instructs the file writing section 105 to open file A, which is a file preset for data recording to convert the video data to a file.

Then, the recording area residual quantity detection section 701 detects a recording area residual quantity of the disk partition in which file A is created and supplies it to the file creation control section 702.

The file writing section 105 writes the video data stored in the buffer 102 in the frame number order unless the total size of file A exceeds the detected recording area residual quantity.

Then, if the case where the image size detection section 103 finds, for example, that the total size will exceed the recording area residual quantity if the image data of frame number N is written additionally, this means that the video data cannot be recorded as a single file in the disk partition in which file A exists. Thus, the image size detection section 103 notifies the file creation control section 702 of excessive total size information. Upon receipt of the excessive total size information, the file creation control section 702 instructs the file writing section 105 to close file A and open file B, which is a file for recording new video data in

another recordable disk partition. The file writing section 105 closes file A in which the video data of up to frame number (N-1) is recorded and opens file B. Furthermore, the file writing section 105 outputs file A that has been closed just before from the output section 106. At this time, the total size is cleared to zero and image data from frame number N onward is recorded in file B.

Furthermore, the recording area residual quantity detection section 701 detects a recording area residual quantity of the disk partition in which file B is created and supplies it to the file creation control section 702.

When the above operations are repeated and all video data stored in the buffer is written, the file creation control section 702 instructs the file writing section 105 to close the file in which the last video data is written. The file writing section 105 closes the file above and outputs it from the output section 106.

As shown above, when recording data in a file and capturing video data into a recording area whose recording area residual quantity is small, this embodiment can capture even high bit rate image data for a long time without data omissions.

Of course, as explained in the first embodiment, it is also possible to target at units such as GOP in which data should not be recorded in different recorded areas instead of frames, so as to prevent data from being split.

In this embodiment, when there is no recordable disk partition, recording is stopped.

This embodiment can also be configured in such a way as to detect the residual quantity of the recording area of a disk partition and the amount of video data corresponding to one sequence to be recorded before writing the data in a file and recreate the file in another disk partition if the first is smaller than the latter. This is because when one sequence is split into two disk partitions, it is more difficult to reproduce the joint section seamlessly and it becomes more complicated to copy, move a file, etc. Therefore, the sequence here is a set of data, which is preferable to be put together in one file. In the case of MPEG, for example, it is a GOP unit and in the case of DV, it is one frame.

In the embodiments described above, file recording is controlled using information such as a file size and voice mode information as individual indices, but it is also possible to control file recording using a combination of a plurality of these indices.

The detecting means of the present invention corresponds to the image mode information detection section 201, the voice mode information detection section 301, the copyright information detection section 501 and image mode information detection section 601 of the embodiments above and the file

recording controlling means of the present invention corresponds to the file creation control section 104.

The embodiments of the present invention are described assuming that a file like file B in which video data is written from file A in which the first video data is recorded onward has been preset in the file writing section 105, but these files can also be newly created as occasion arises.

Furthermore, the above embodiments are targeted at a capture apparatus to capture AV images into a computer, but the present invention is not limited to this and can also be applied to a recording apparatus handling data other than AV images.

The present invention is a medium carrying programs and/or data to make a computer execute all or some functions of all or some means of the present invention and is a medium that can be read by the computer and that allows the programs and/or data read above to function together with the computer to execute the functions above.

Furthermore, the present invention is an information package that is a program and/or data to make a computer execute all or some functions of all or some means above of the present invention and is an information package that can be read by the computer and that allows the program and/or data read above to function together with the computer to execute the functions above.

Here, the "data" includes a data structure, data format and type of data, etc.

The "medium" includes recording medium such as ROM, transmission medium such as the Internet and transmission medium such as light, radio wave and sound wave.

The "medium carrying data" includes, for example, a recording medium that records a program and/or data and a transmission medium that transmits a program and/or data.

"That can be processed by a computer" means that a recording medium such as ROM can be read by a computer or that a program and/or data to be transmitted can be handled by a computer as a result of transmission in the case of a transmission medium.

The "information package" includes software such as a program and/or data.

The configuration of the present invention described above can be implemented by software or hardware.

As explained above, the present invention can record images of a video camera, etc. in a file on a computer without exceeding an upper limit of a file size or without omissions in the middle of capturing.

When the image mode, voice mode or copyright information changes, the present invention allows each file to keep one type of image mode information, voice mode information or copyright information.

What is claimed is:

1. A data recording apparatus that sequentially inputs data configured in units that cannot be recorded across different files and records the data in a file having a predetermined volume, comprising:

size detecting means for deciding when data is sequentially recorded in file, whether next unit of the data to be recorded can be fully recorded in the same file, or not;

file creation controlling means for recording said next data to be recorded in another file or stopping recording if the case where the result of the decision by said size detecting means shows that recording is not possible; and

file writing means for writing data in a file according to the control from said file creation controlling means.

2. A data recording apparatus that records data in a file comprising:

detecting means for detecting a change of a property attached to said data;

file recording controlling means for recording data in said plurality of files or stopping recording according to said change of the property; and

file writing means for writing data in a file according to the control from said file creation controlling means.

3. The data recording apparatus according to claim 2, wherein said property is image mode information and

said file recording controlling means records data by switching to another file as a file in which said data is to be recorded or stops recording when the content of said image mode information changes.

4. The data recording apparatus according to claim 2, wherein said property is voice mode information and said file recording controlling means records data by switching to another file as a file in which said data is to be recorded or stops recording when the content of said voice mode information changes.

5. The data recording apparatus according to claim 2, wherein said property is copyright information and said file recording controlling means records data by switching to another file as a file in which said data is to be recorded or stops recording when the content of said copyright information changes.

6. The data recording apparatus according to claim 5, wherein said copyright information means at least COPY FREE, COPY ONCE or COPY NEVER or COPY NO MORE of said data and

in the case of COPY ONCE, the copyright information is rewritten as prohibition of reproduction before data recording.

7. A data recording apparatus that records data in a file comprising:



detecting means for detecting a change of a property attached to said data;

file recording controlling means for converting the property of said data to the previous property and recording data in said file when said detecting means detects a change of the property; and

file writing means for writing data in a file according to the control from said file creation controlling means.

8. The data recording apparatus according to claim 7, wherein said property is image mode information and said file recording controlling means converts the content of said data to the image mode information before the content is changed and records data in said file when the content of said image mode information changes.

9. The data recording apparatus according to claim 7, wherein said property is voice mode information and said file recording controlling means converts the content of said data to the voice mode information before the content is changed and records data in said file when the content of said voice mode information changes.

10. A data recording apparatus that records data inputted in file units in another file, comprising:

detecting means for detecting the type of a property attached to said data;

file recording controlling means for when said detecting means detects a plurality of types of property in one file, converting and unifying properties of all data that belongs to the file to a property of one of the plurality of types of property and recording the data in a new file; and

file writing means for writing data in a file according to the control from said file creation controlling means.

11. The data recording apparatus according to claim 10, wherein said property is image mode information.

12. The data recording apparatus according to claim 10, wherein said property is voice mode information.

13. A data recording apparatus that sequentially inputs data configured in units that cannot be recorded across different recording areas and records the data as a file in a recording area having a predetermined volume, comprising:

size detecting means for deciding when data is sequentially recorded in the recording area whether next unit of the data to be recorded can be fully recorded in the same recording area, or not;

file creation controlling means for recording said next data to be recorded in another recording area or stopping recording if the result of the decision by said size detecting means shows that recording is not possible; and

file writing means for writing data in a file according to the control from said file creation controlling means.



ABSTRACT

A data recording apparatus that sequentially inputs data configured in units that cannot be recorded across different files and records the data in a file having a predetermined volume, has:

size detecting means for deciding when data is sequentially recorded in file, whether next unit of the data to be recorded can be fully recorded in the same file, or not;

file creation controlling means for recording said next data to be recorded in another file or stopping recording if the case where the result of the decision by said size detecting means shows that recording is not possible; and

file writing means for writing data in a file according to the control from said file creation controlling means.

Fig. 1

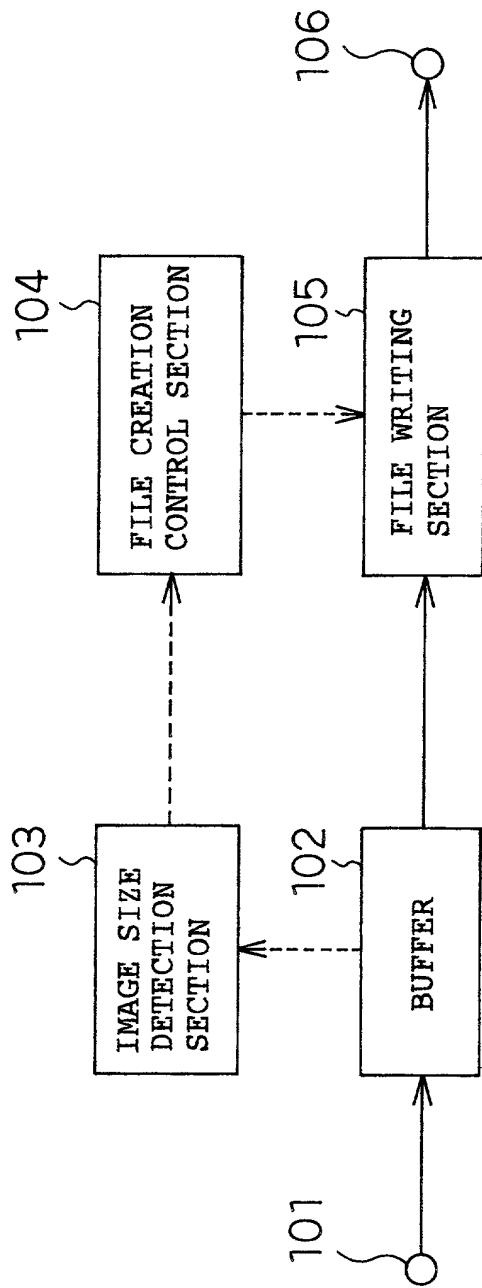


Fig. 2

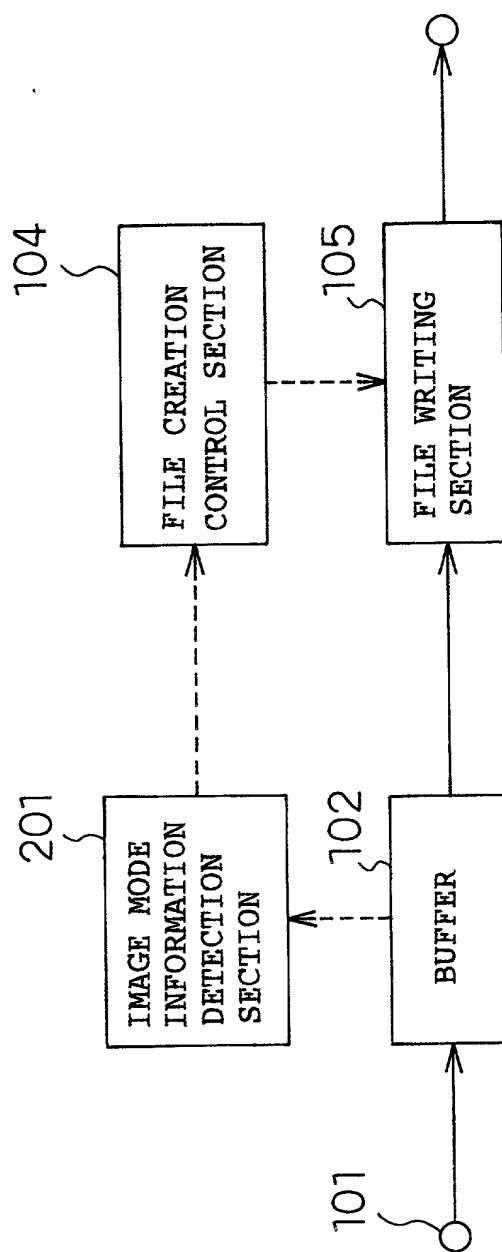


Fig. 3

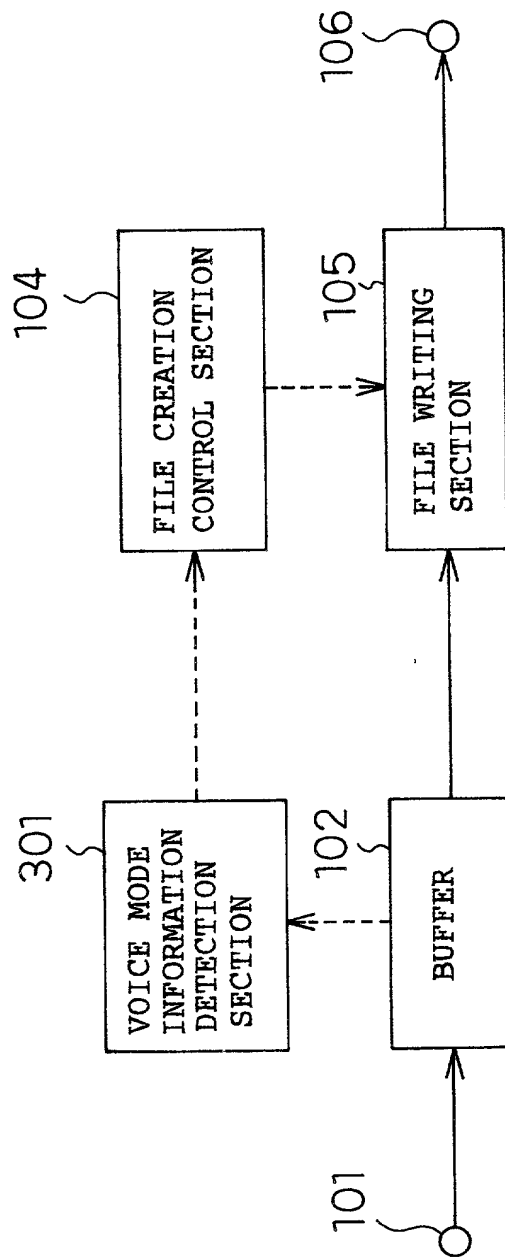


Fig. 4

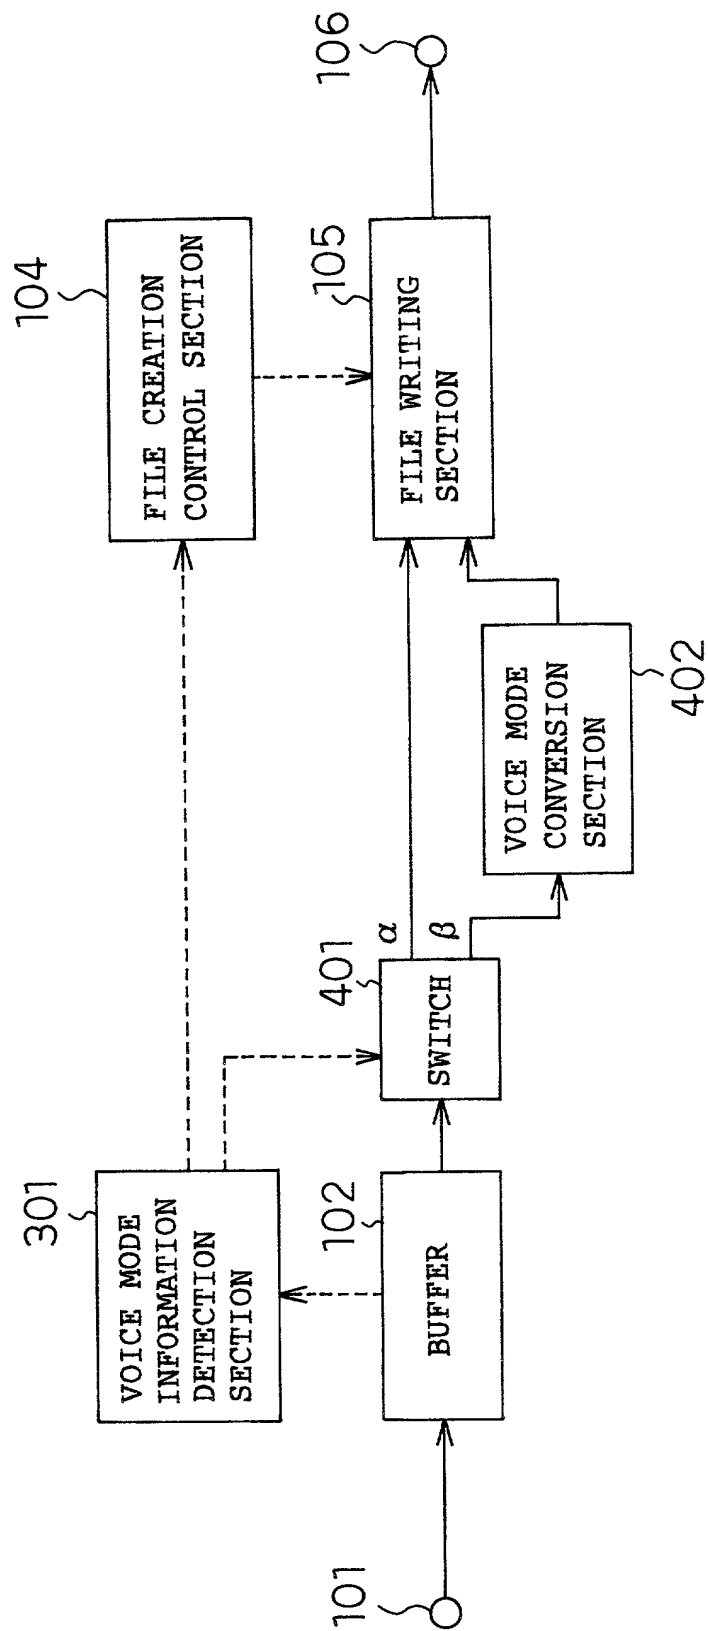




Fig. 5

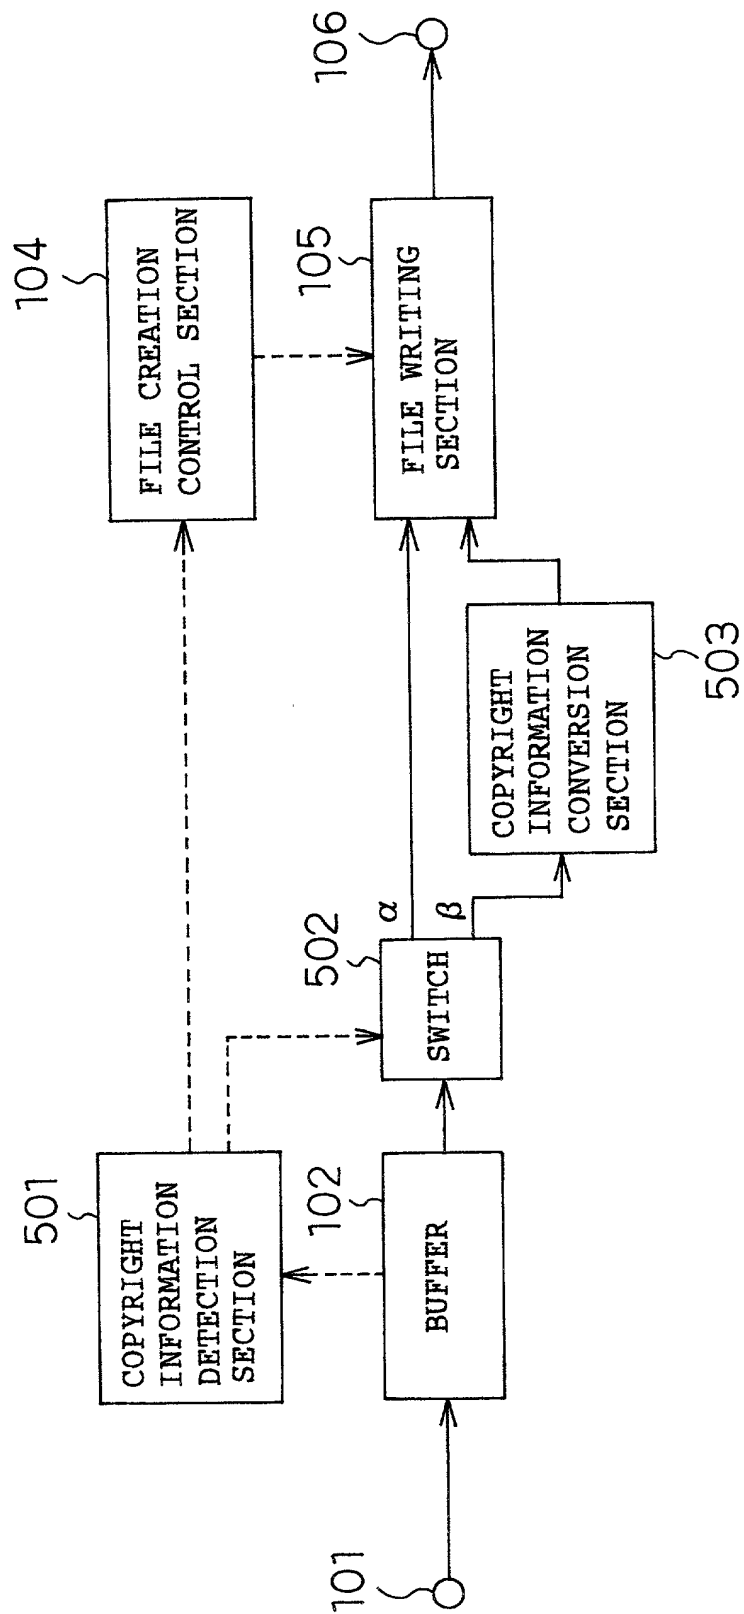


Fig. 6

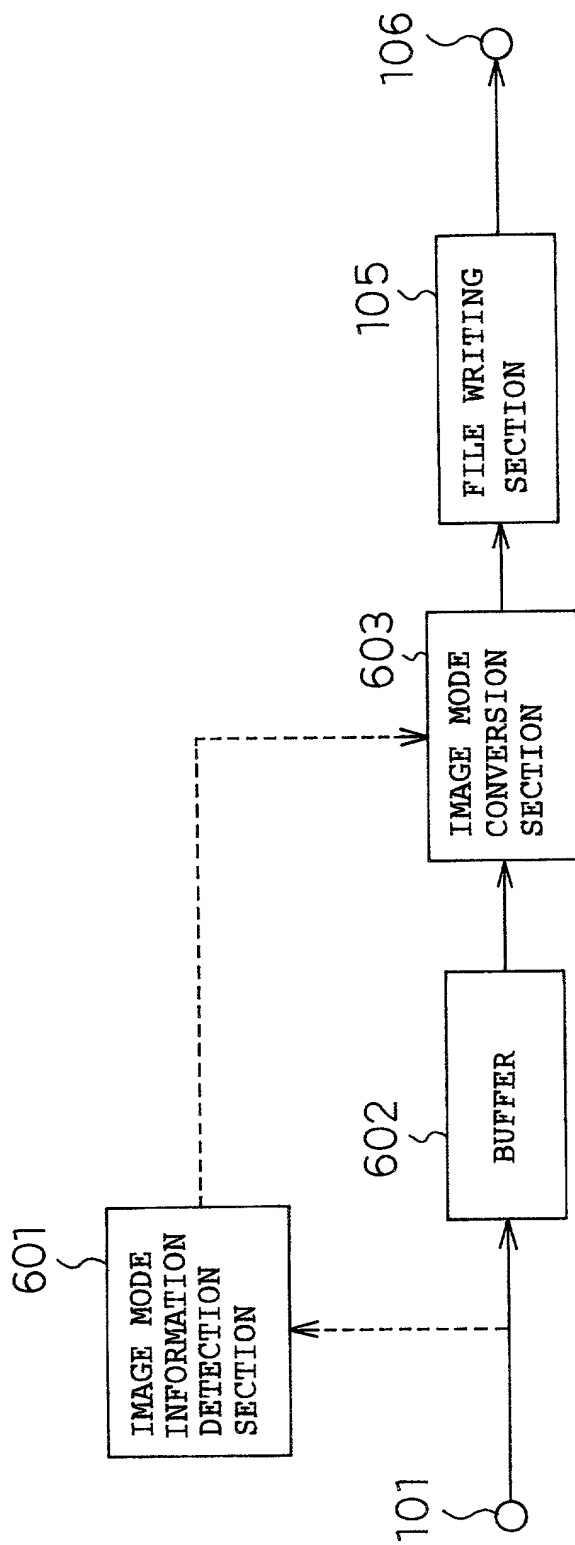


Fig. 7


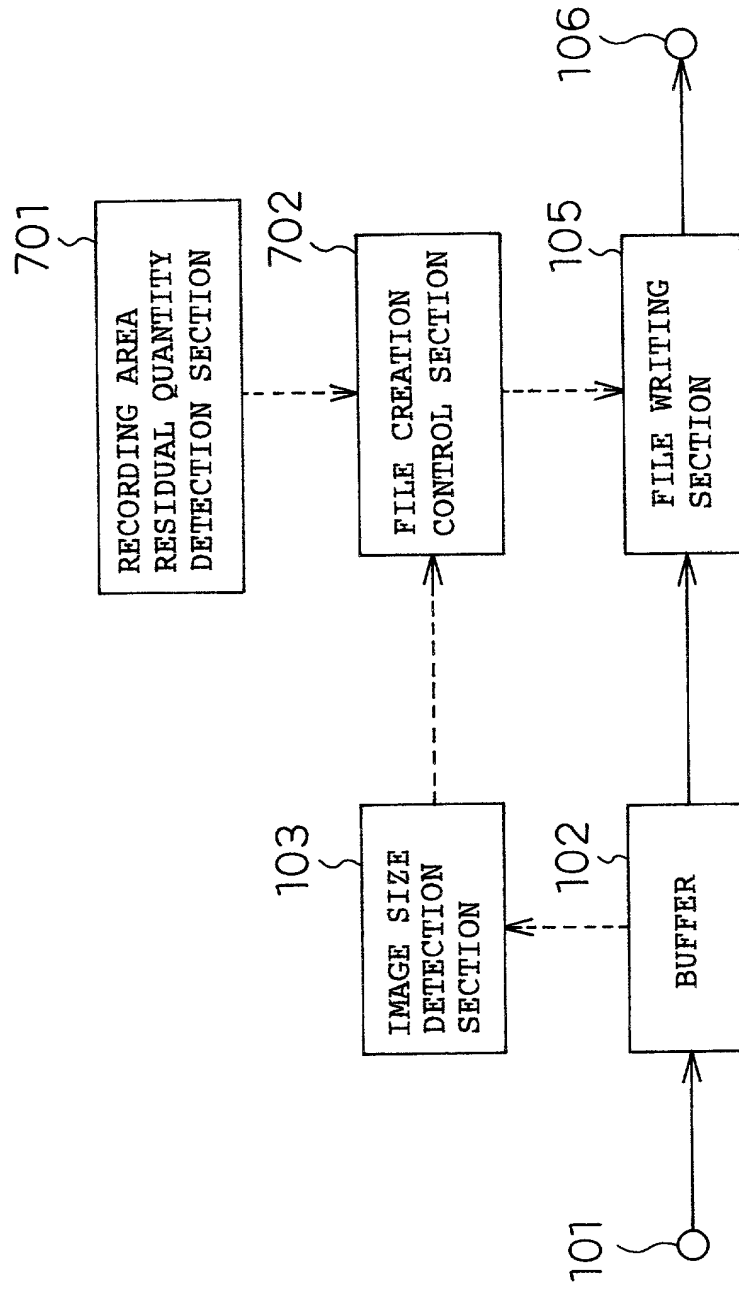


Fig. 8

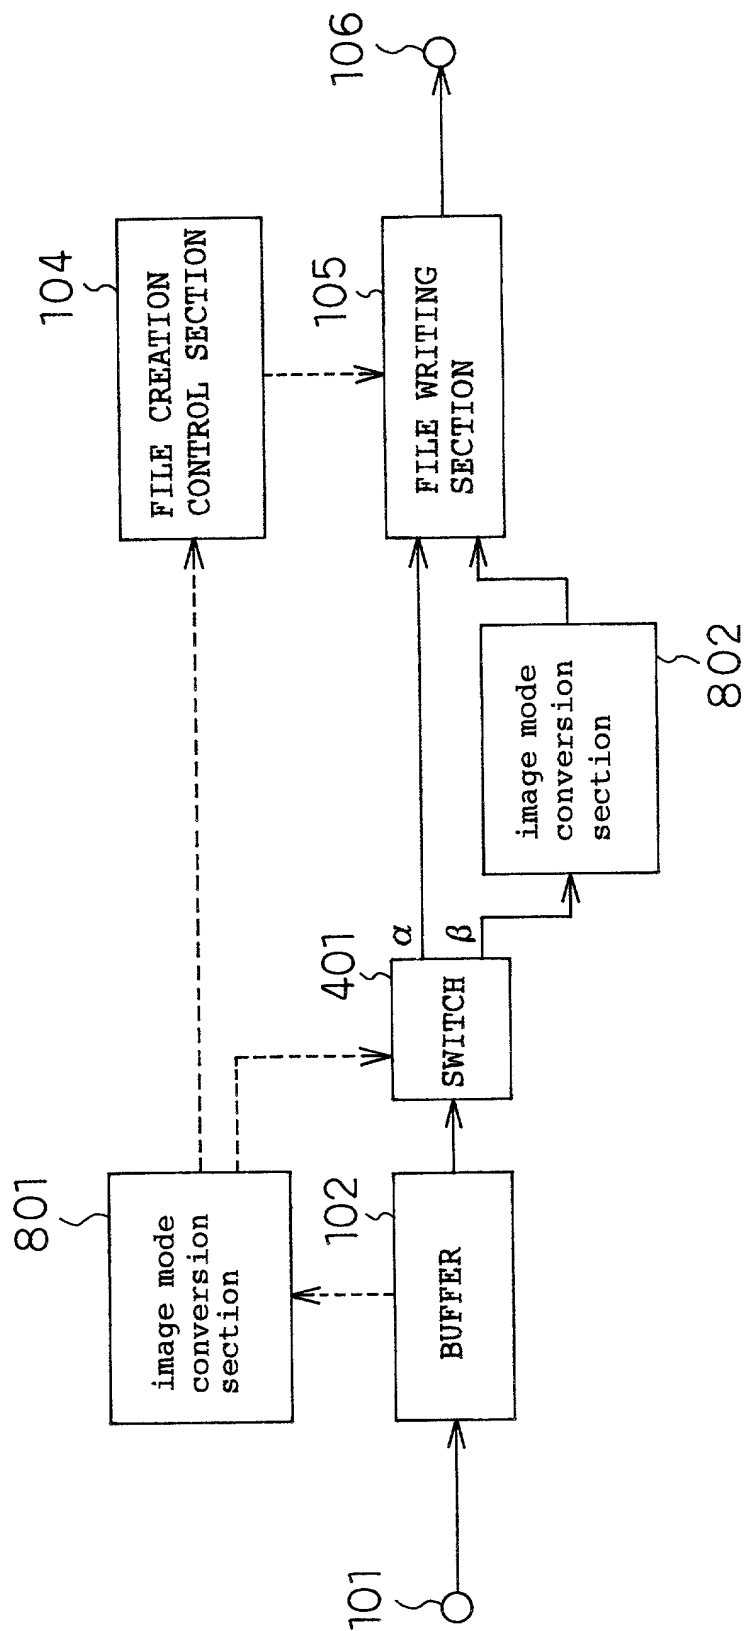

# Declaration and Power of Attorney United States Patent Application

UNITED STATES (Form BDWY-1)  
Patents and Design Patents  
Sole & Joint Inventors  
Convention & Non-convention  
PCT & Non-PCT

This form cannot be amended, altered  
or changed after it is signed.  
(For use only for inventors who  
understand the English language.)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

DATA RECORDING APPARATUS, MEDIUM AND INFORMATION PACKAGE

(check one) ☒ is attached hereto.

- ☐ was filed as U.S. Application No. \_\_\_\_\_ on \_\_\_\_\_ and (if applicable) was amended on \_\_\_\_\_.
- ☐ was filed as PCT International Application No. \_\_\_\_\_ on \_\_\_\_\_ and (if applicable) was amended under PCT Article 19 on \_\_\_\_\_.

(I authorize any attorney appointed below to insert information in the preceding blanks.)

I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) or §365(b) of any foreign and PCT application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States of America listed in this Declaration. I have also identified below any foreign application for patent or inventor's certificate or PCT international application having a filing date before that of the application(s) on which priority is claimed:

Foreign/PCT Application No.	Country	Filing Date	Priority Claimed? (yes/no)
Hei 11-300,220	JAPAN	October 21, 1999	YES

I hereby claim the benefit under Title 35, United States Code, §120 or §365(c) of any United States application and PCT international application designating the United States of America listed in this Declaration and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application or PCT international application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

U.S. Application No.	Filing Date	Status (patented/pending/abandoned?)

I hereby claim priority benefits under Title 35 United States Code §119(e) of any U.S. provisional application(s) listed below:

U.S. Provisional Application No.	Filing Date

I hereby appoint the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Joseph A. DeGrandi (17446), Robert G. Weilacher (20531), Richard G. Young (20628), Michael A. Makuch (32263), Dennis C. Rodgers (32936), Thomas L. Evans (35805), Frank C. Cimino, Jr. (39945), Carolyn Favorito (39183), George A. Metzenthin (P41995), and Steven W. Collier (P42429).

Send all correspondence to Beveridge, DeGrandi, Weilacher & Young, L.L.P., Suite 800, 1850 M Street, N.W., Washington, D.C. 20036. Facsimiles may be sent to (202) 659-1462. Direct all telephone calls to (202) 659-2811.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: Tadashi ONO

Residence (city, state, country): Kyotanabe-shi, Kyoto JAPAN

Post office address: 6-9, Kasumizaka 3-chome, Kyotanabe-shi, Kyoto 643-0352 JAPAN

Citizenship: JAPAN

Signature: Tadashi Ono Date: October 6, 2000

Full name of second joint inventor, if any: Tatsuro JURI

Residence (city, state, country): Osaka-shi, Osaka JAPAN

Post office address: 1-5-8-2804, Tomobuchi-cho, Miyakojima-ku, Osaka-shi, Osaka 534-0016 JAPAN

Citizenship: JAPAN

Signature: Tatsuro Juri Date: October 6, 2000

☐ Additional inventors and/or prior applications are listed in attached Supplemental Sheet(s).